

Reception Counter Detail



DESIGN INTENT

A royal deep-plum reception counter with white quartz top, violet reveal lighting, stainless plinth and a softened corner for a premium customer path.

KEY DIMENSIONS


- Customer front run: 2450 mm.
- Side return run: 3150 mm.
- Standard counter depth: 700 mm.
- Finished height: 1050 mm.
- Plinth height: 100 mm.
- Accessible lowered section: 760-800 mm high, 900 mm wide if required.

IMPORTANT

- Dimensions are derived from the current concept plan.
- Contractor must verify exact walls, columns, glass line and door swing on site.
- Issue final shop drawing after checking POS, printer, cash drawer and cable routing.

Top Plan & Overall Footprint

L-SHAPE COUNTER PLAN

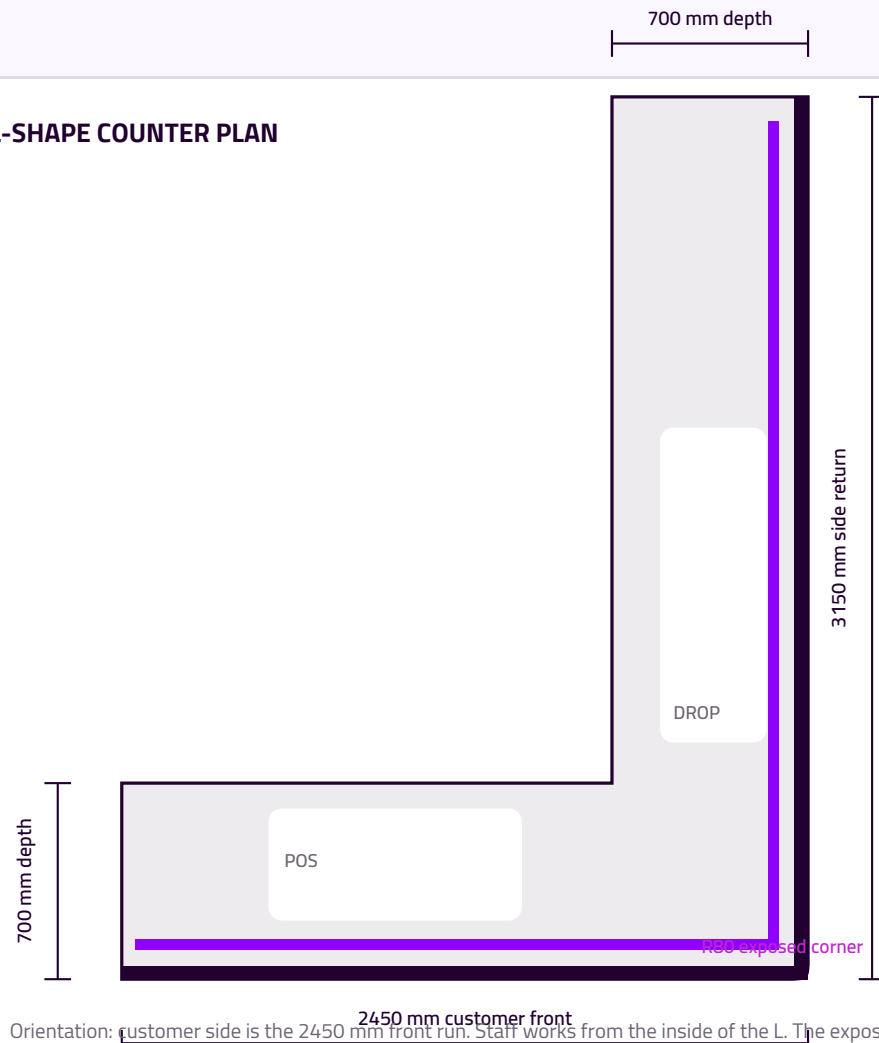


PLAN NOTES

- Keep 900-1000 mm clear staff passage behind counter where possible.
- Top overhang: 25-30 mm on customer side, 10-15 mm on staff side.
- Cable grommets at POS and printer positions.
- Coordinate counter edge with entrance door and customer queue line.

TOP SURFACE

- White quartz or solid surface, 30-40 mm visual thickness.
- Soft arris on all exposed edges.
- Avoid porous stone due to detergent, moisture and daily cleaning.
- Seal all joints with moisture-resistant silicone.

Front & Back Elevations

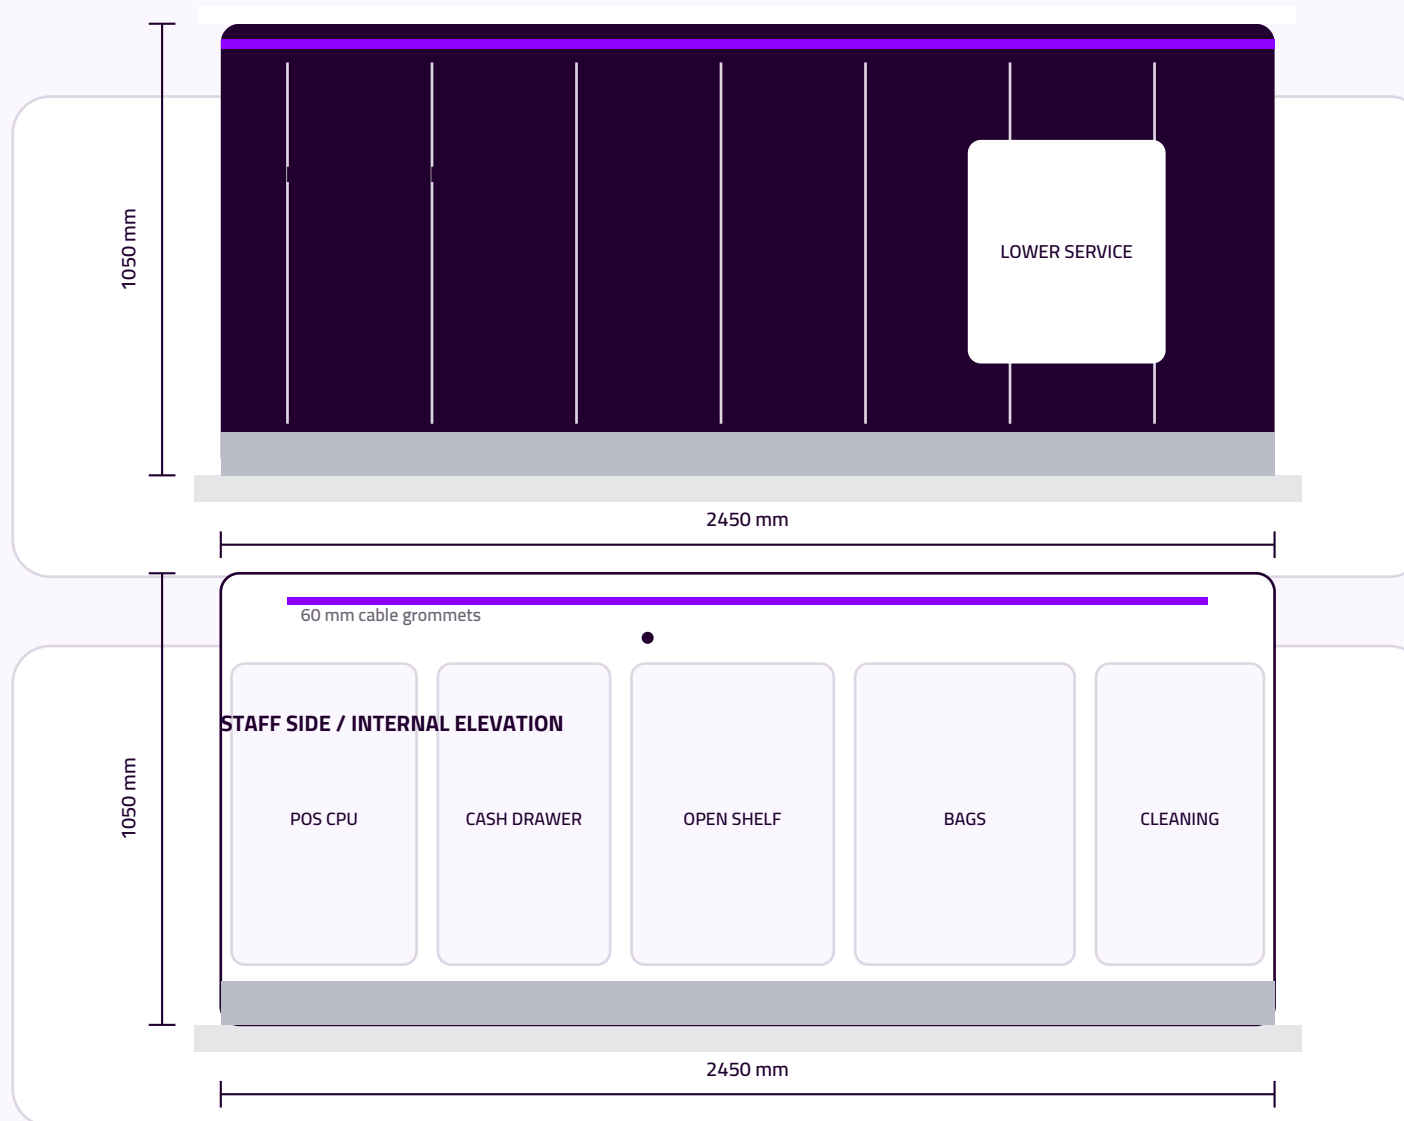

FRONT FINISH


- Main face: deep royal plum HPL, satin finish.
- Horizontal reveal: royal purple LED line with opal diffuser.
- Toe kick: brushed stainless steel, 100 mm high.
- Optional: subtle vertical grooves or panels, easy to wipe clean.

STAFF SIDE


- Lockable storage where cash or devices are kept.
- Open shelf for bags and printer paper.
- Ventilation openings for POS CPU or UPS.
- Removable rear panels for maintenance.

Left, Right & Corner Details


LEFT END PANEL

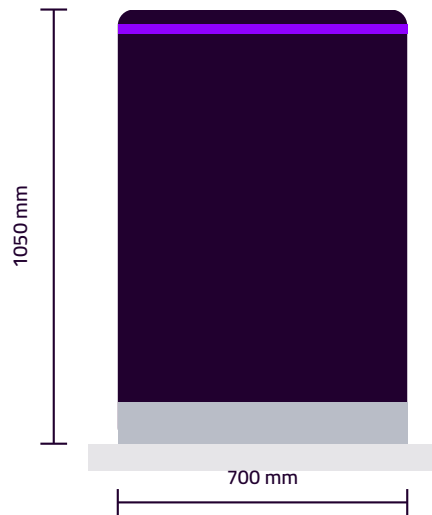

RIGHT END PANEL

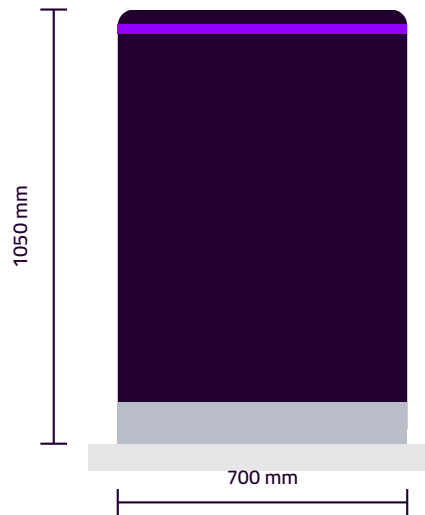

EXPOSED CORNER DETAIL

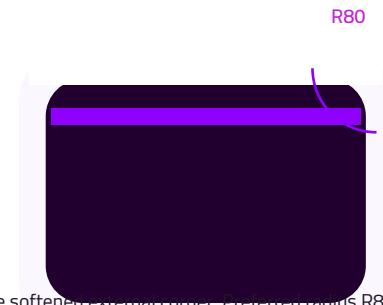


- Use softened external corner. Preferred radius R80 mm.
- If radius fabrication is difficult, use a 150 x 150 mm chamfer.
- No sharp edges on the customer route.

SIDE AND CORNER NOTES

- Left and right end panels must continue the same deep-plum HPL wrap so the counter reads as one solid object from every angle.
- Use concealed adjustable legs behind the stainless plinth. Plinth should be removable for cleaning and service.
- If the side return touches a wall, leave a 10-15 mm scribed filler to absorb wall irregularity.
- All exposed customer-side vertical edges: minimum R3 edge softening. Main outside corner: R80 preferred.
- LED transformer and dimmer must stay accessible from the staff side, not sealed inside the body.

Vertical Section & Materials

TYPICAL VERTICAL SECTION

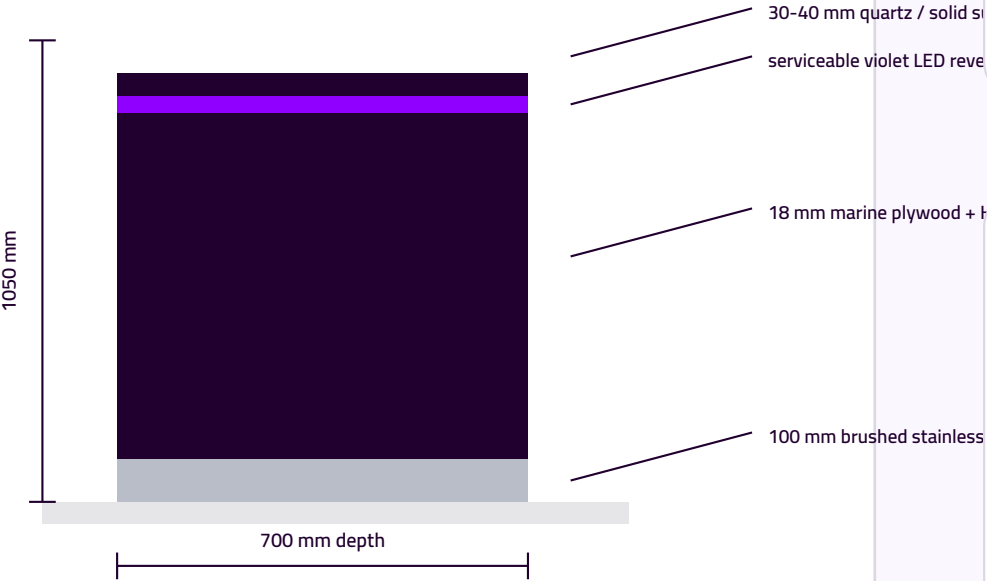

MATERIAL SCHEDULE

ITEM	MATERIAL	NOTE
Top	White quartz / solid surface	30-40 mm visual thickness
Body	Moisture-resistant HPL	Deep royal plum #21002F
Accent	LED reveal	Royal purple #8F00FF, 4000K
Plinth	Brushed stainless steel	100 mm removable toe kick
Hardware	Soft-close hinges / runners	Commercial grade

FABRICATION CHECKLIST

- Confirm POS, printer, QR scanner, cash drawer and customer card machine positions.
- Confirm power, data and low-voltage route before carcass production.
- Make one corner mock-up for approval: plum HPL, quartz edge, LED reveal and plinth.
- Use shop drawings with exact site-measured dimensions before cutting.

Engineer Handover Notes

WHAT THE DECOR CONTRACTOR SHOULD PRODUCE NEXT

- Final measured shop drawing with plan, front, back, two sides, section and fixing details.
- Exact internal cabinet layout based on the owner's POS workflow and devices.
- Electrical drawing for sockets, data point, LED driver, switch and maintenance hatch.
- Material sample board: white top, deep-plum HPL, violet LED diffuser, stainless plinth and edge sample.
- A 3D joinery view showing the rounded corner and staff-side storage before fabrication.

APPROVAL HOLD POINTS

- Site measurement approved.
- Counter corner detail approved.
- Material samples approved under actual lighting.
- Electrical and data route approved.
- First installed LED reveal approved before closing panels.

ASSUMPTIONS TO VERIFY

- Counter height and lowered section comply with local accessibility requirements.
- Door swing, customer queue and reception circulation are clear.
- No conflict with floor drains, columns, glass facade frame or AC outlets.
- Moisture protection and cleaning access are included.